
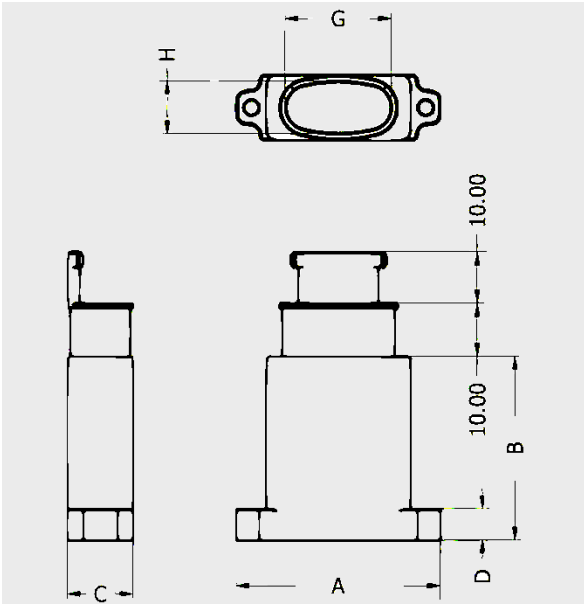


D-SUB
BACKSHELLS

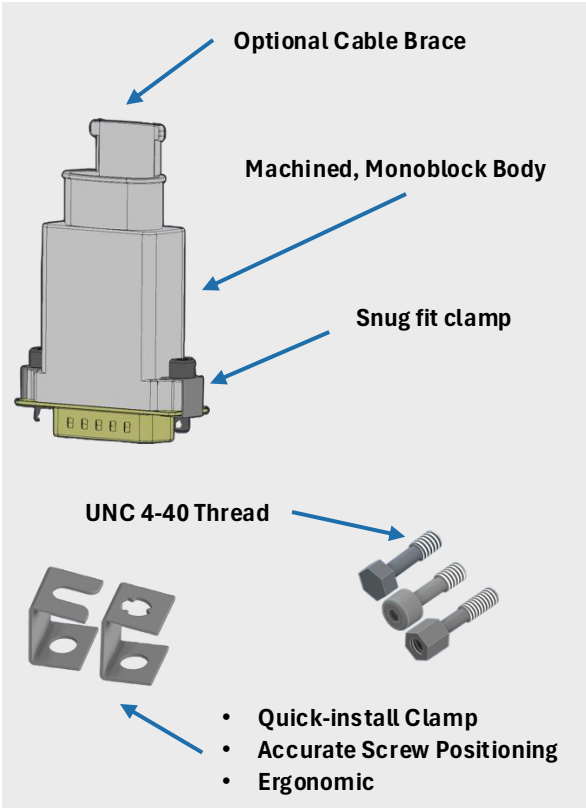


ESCC COMPATIBILITY	3401/072
MATERIAL	
Shell	Aluminum 6082
Clamp	Stainless Steel AISI 304
Screw	Stainless Steel AISI 304
FINISH	
Al Parts	Electroless Nickel i.a.w. ASTM B733-4 13.5/25.4 µm min
SS Parts	Passivation i.a.w. AMS2700
MAGNETISM	< 200 Gamma
MARKING	Etched. Part Number, Lot Number
OPERATION TEMP.	-55° ... 125° C
CLEANLINESS	ISO 5 Compatible
TESTING LEVEL	B

Ultra Lightweight
Monoblock
Nonmagnetic


Connector Sizes	E, A, B, C, D, F
Gland Orientation	Straight up
	45° Side/Face
	90° Side/Face
Backshell Height	Standard: 25, 35, 45 mm/Custom Dimensions
Gland	Circular, Oval, Standard/Custom Dimensions
Cable Brace	Optional



GLAND ORIENTATION

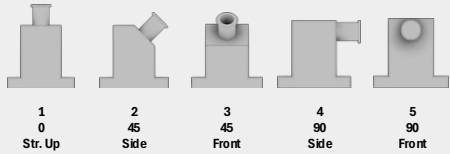

GLAND TYPE

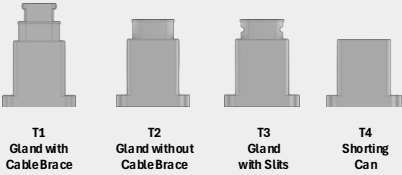


BACKSHELL HEIGHT

CONN'R	- B -
ALL	25
ALL	35
ALL	45
ALL	CUSTOM

GLAND DIMENSION: H

CONN'R	- H -
ALL	08
ALL	10
D/F	13
F	15

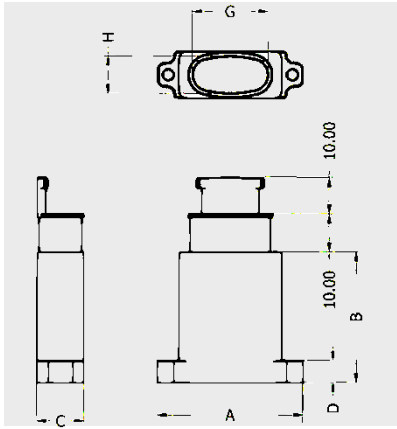

FOR GLAND ORIENTATION 1, 3, 5

		GLAND DIMENSION: G										
CONN'R	-H-	MAX										
ALL	08	08										
ALL	10	10										
E	10	16										
A	10	15		20							25	
B	10	15		20		25	30	35				39
C	10	15	20	25	30	35	40	45	50			55
D	10	16	20	25	30	35	40	45				52
D	13	13	20	25	30	35	40	45				52
F	10	20		25		30	35	40	45			55
F	15	20		25		30	35	40	45	50	55	


FOR GLAND ORIENTATION 2

CONN'R		-H-	GLAND DIMENSION: G				MAX
ALL	08	08					
ALL	10	10					
A	10	15					
B	10	15	20				
C	10	15	20	25			
D	10	15	20	25			
D	13	13	20	25			
F	10	12	20	25			
F	15	12	20	25			

FOR GLAND ORIENTATION 4

CONN'R			GLAND DIMENSION: G				MAX
ALL	ALL	08	08				
ALL	ALL	10	10				
ALL	35	10	15	20			
ALL	45	10	15	20	20	30	
D	35	13	13	20			
D	45	13	13	20	25	30	
F	35	15	15	20	25	30	
F	45	15	15	20	25	30	

ACCESSORIES SET TYPE: AAA

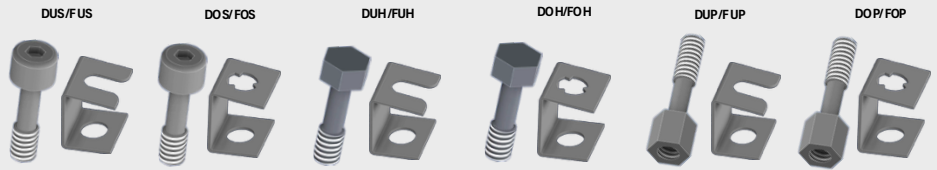

ELECTROLESS NICKEL: N

M: Med. Ph: 13.5 µm min
H: High Ph: 25.4 µm min

DISTRIBUTION



ABEAMS.R.L., 7 Intr. Geneva str., FL 1
011735 Bucharest, Sector 1, Romania
email: sales@abeamsrl.com,
web: abeamsrl.com
Tel. +40 31 229 5745



AMBS01.X.TX.BB.X.HHGG.N-AAA

